

REVISIONS						
ZONE	REV	ECN	DESCRIPTION	DATE	DR	CK
	A		INITIAL RELEASE	2021SEP24	JK	GM
	B	1511223	FORMER MODEL NUMBERS ADDED	2024APR15	K.SHRINIDHI	M.SMITH

3200 LET DRIVE "DOUBLE ENVELOPE" LIP SEAL UNIT SHOWN. RIGHT DRIVE SIMILAR.
SEE TABLE FOR MODELS WITH DIFFERING LENGTHS




SHAFT "H"
WITH KEY "J"

3/4 NPT
INLET AND OUTLET

ALTERNATE DRIVE SHAFT
LOCATION

OPTIONAL SPM MOUNT
(3) EACH END PLATE

"G" FLANGE
150# ANSI PATTERN

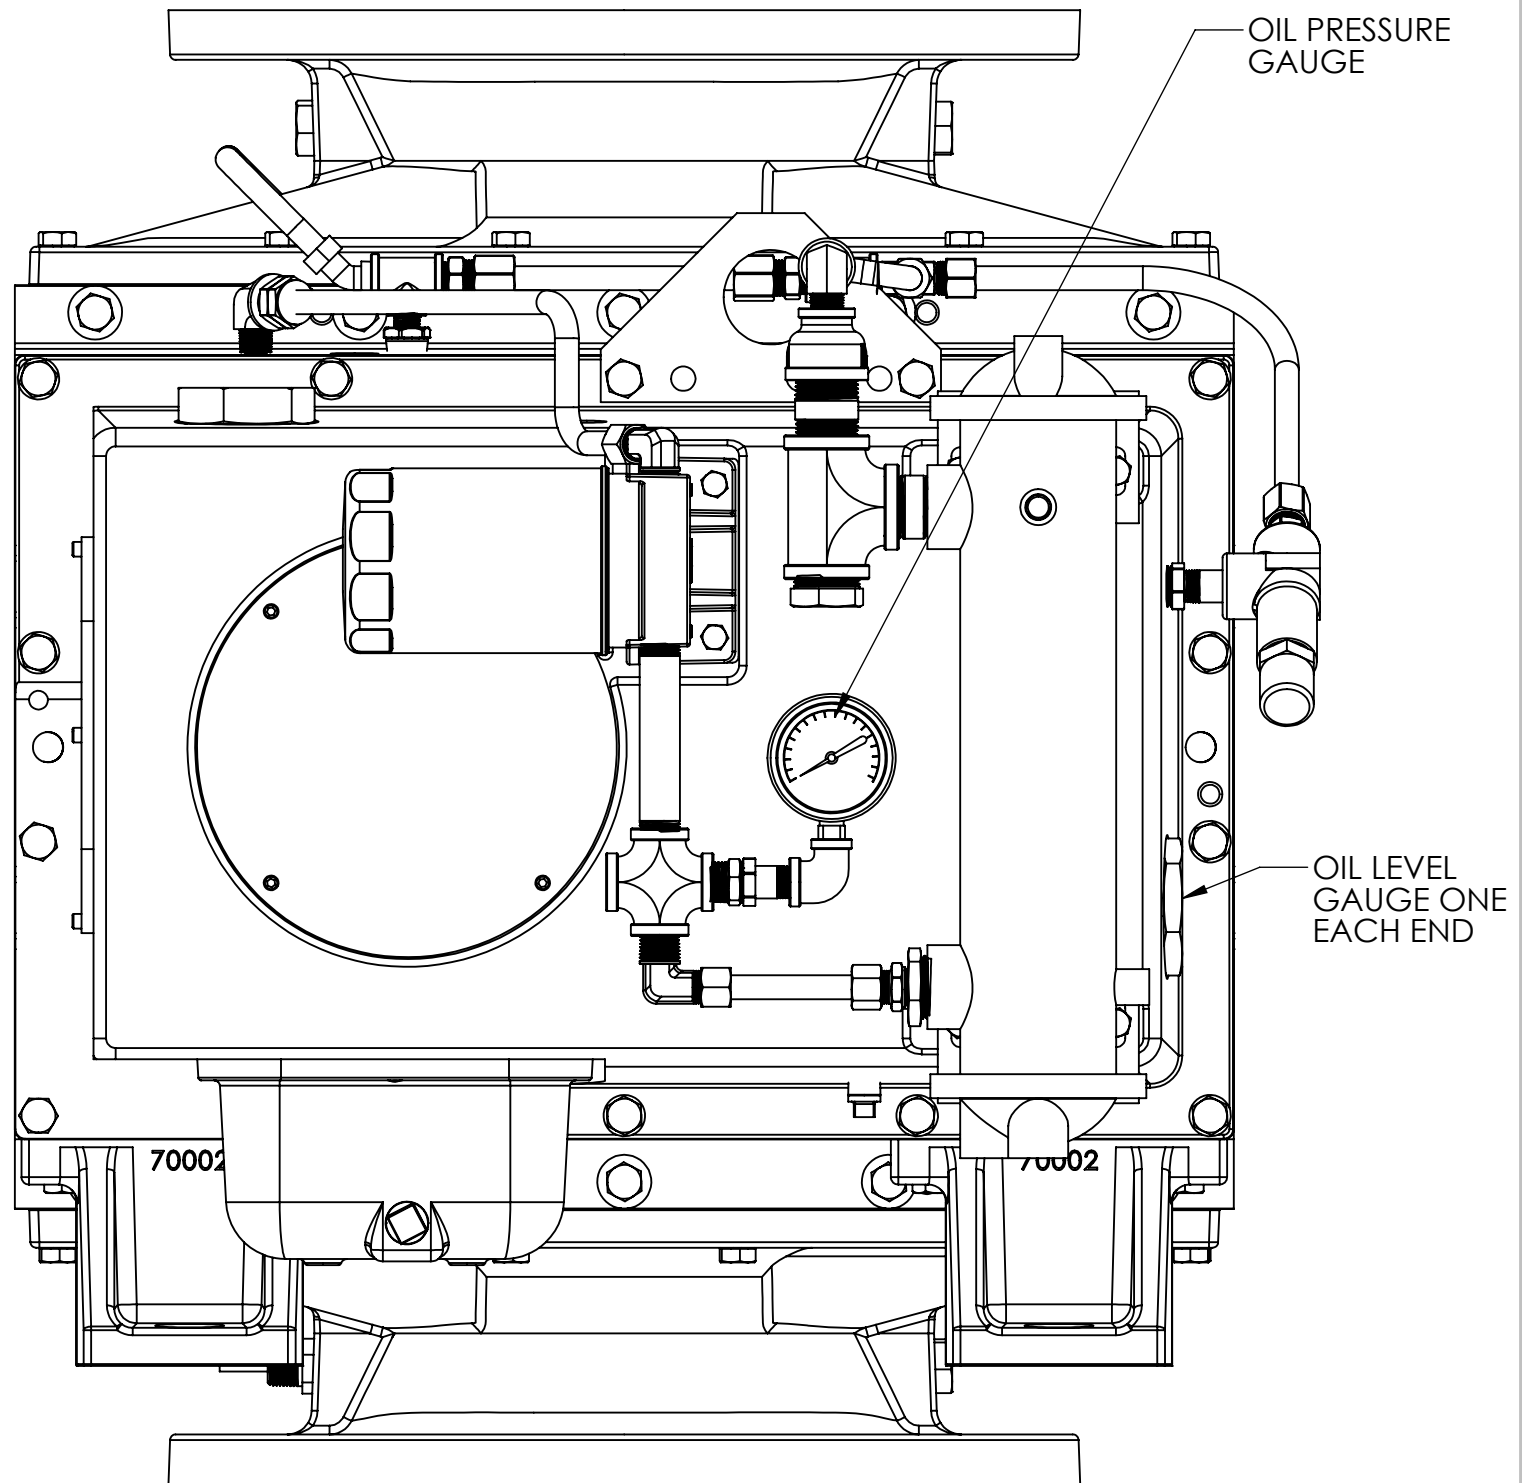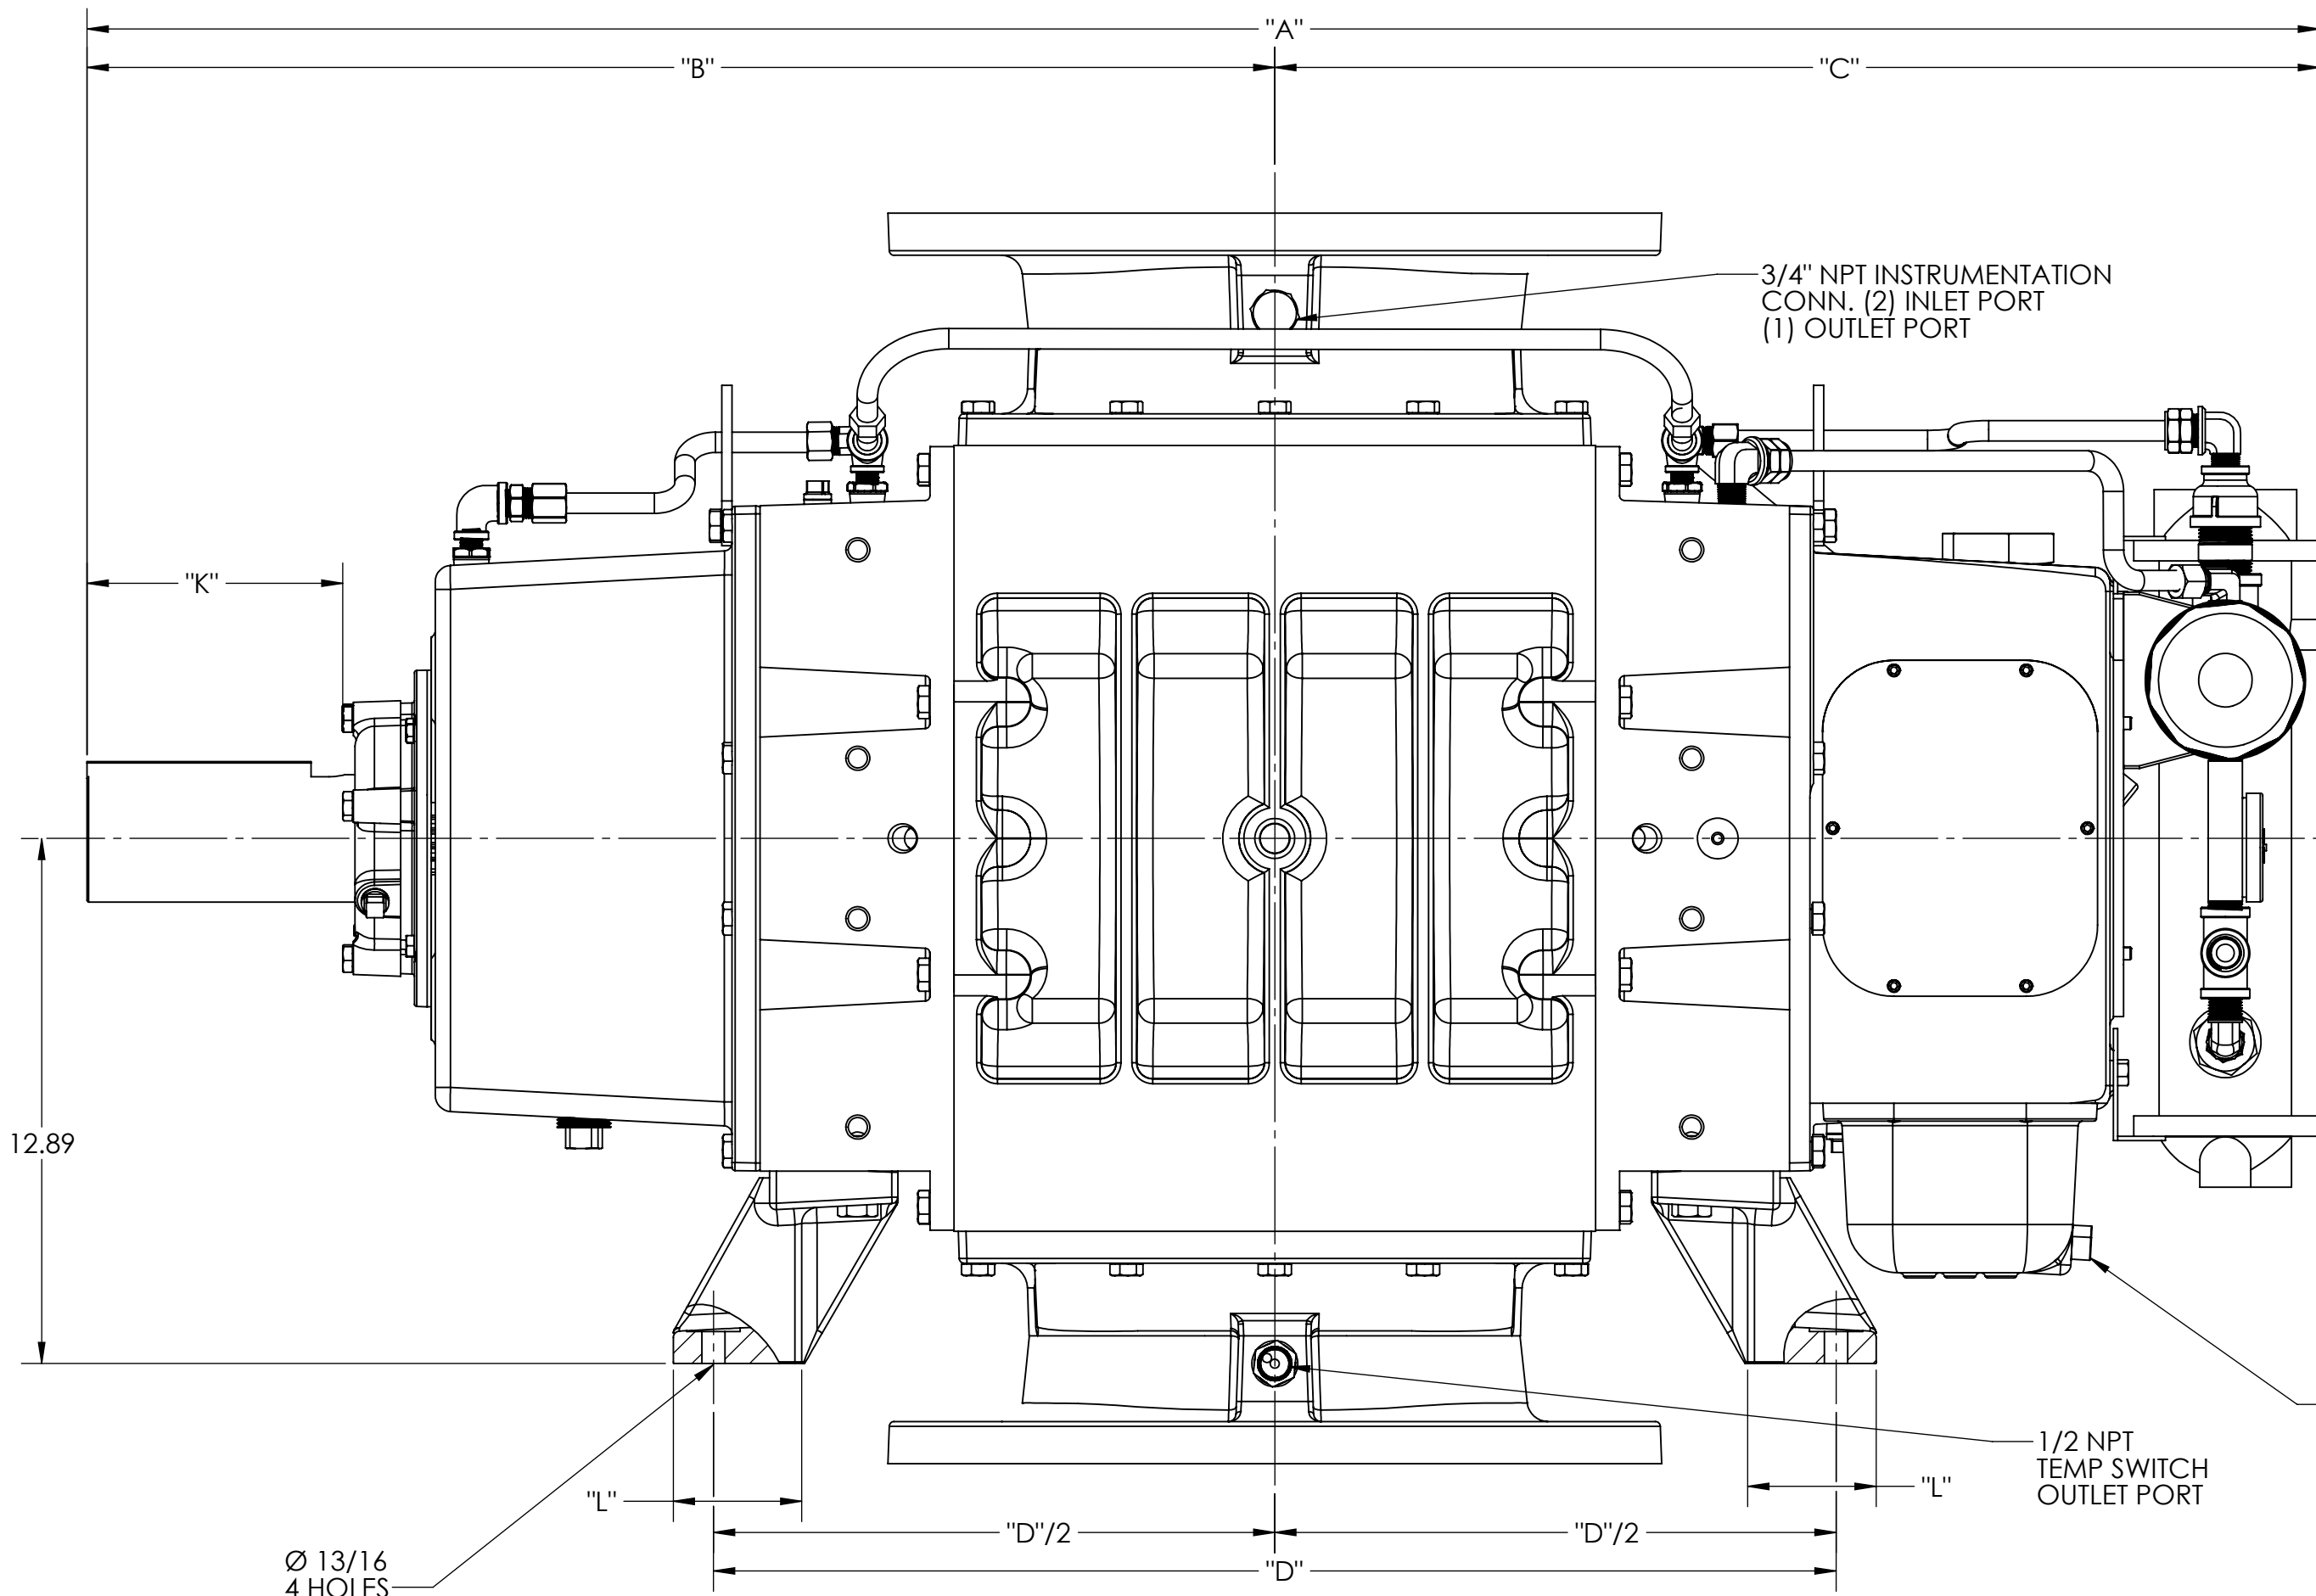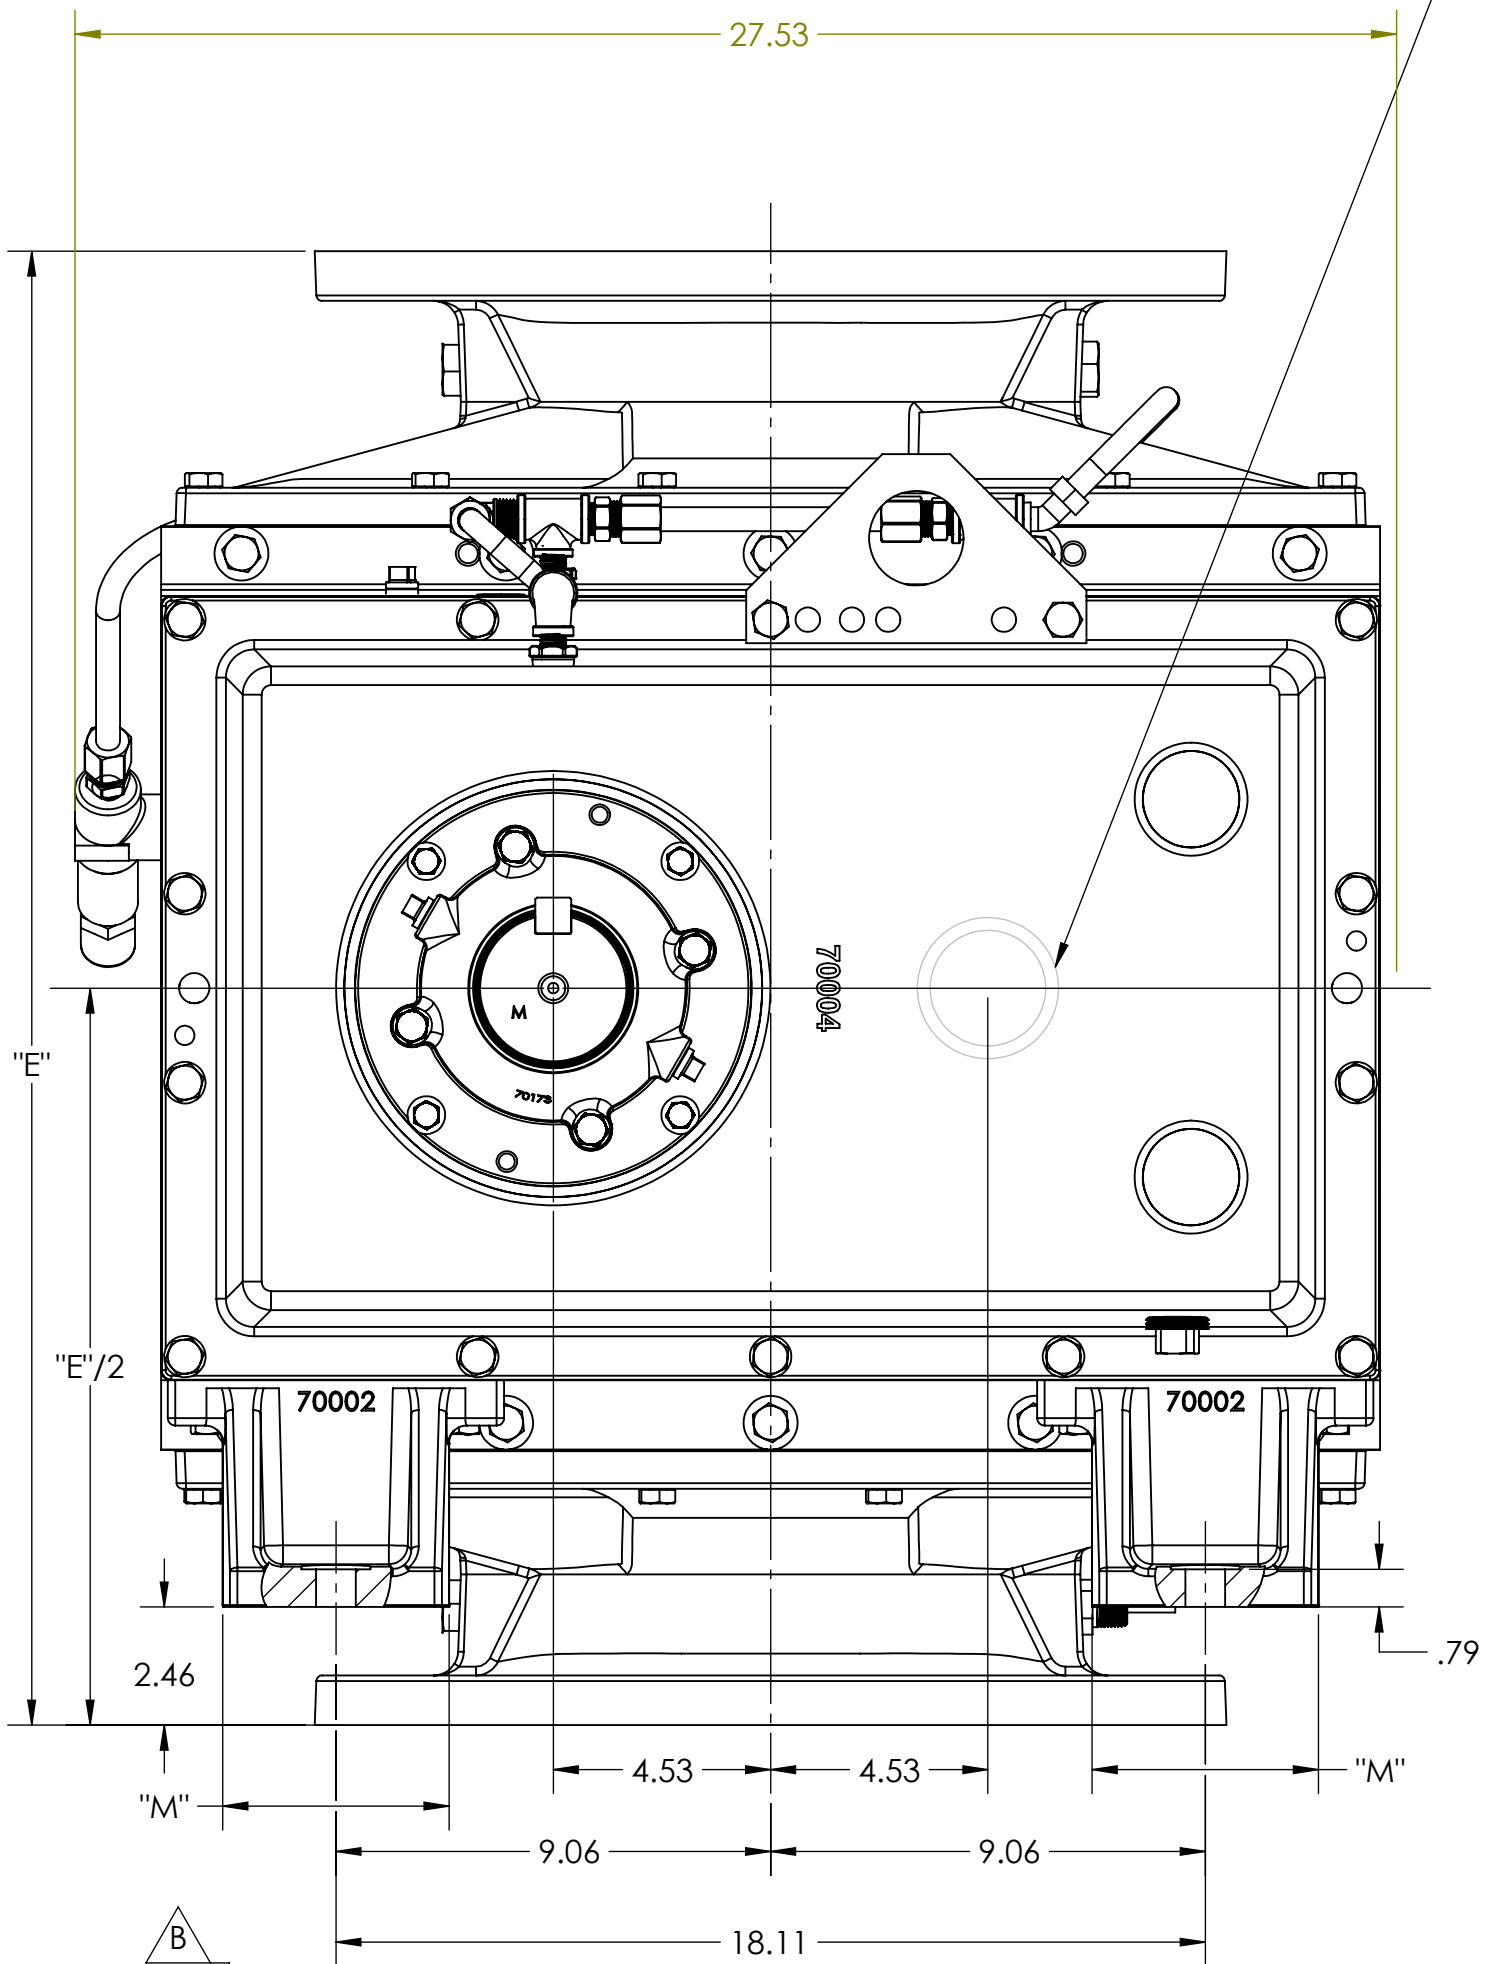

-	-	OVERALL LENGTH	SHAFT-PORT LENGTH	PORT-REAR LENGTH	FOOTPRINT LENGTH	PORT WIDTH	PORT STD / METRIC (mm)	SHAFT Ø STD / METRIC (mm)	KEY SIZE STD / METRIC (mm)	SHAFT LENGTH STD / METRIC (mm)	APPROX WEIGHT (lbs)	FOOT LENGTH	FOOT WIDTH
MODEL	FORMER MODEL	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "G"	DIM "H"	DIM "J"	DIM "K"	-	DIM "L"	DIM "M"
3200	9016	54.81	29.08	25.73	27.56	30.70	12 / 300	3.12 / 48	.75 SQ x 5.50 / 22 x 14 x 145	6.20 / 157	1710	3.15	4.75
4200	9020	59.55	32.15	27.40	32.48	30.70	12 / 300	3.12 / 48	.75 SQ x 5.50 / 22 x 14 x 145	6.20 / 157	1950	3.5	4.75
5400	9027	66.62	34.98	31.64	39.37	30.70	14 / 350	3.12 / 48	.75 SQ x 5.50 / 22 x 14 x 145	6.20 / 157	2185	3.5	4.75
7300	9036	75.28	39.32	35.96	48.03	30.70	16 / 400	3.12 / 48	.75 SQ x 5.50 / 22 x 14 x 145	6.20 / 157	2600	3.13	4.75

UNLESS OTHERWISE SPECIFIED
US CUSTOMARY IN

X.01
X.0002
MACHINED SURFACE FINISH: 125μ
BREAK ALL SHARP EDGES, CORNERS, DEBURR AND CLEAN

INTERPRET PER ASME Y14.5-2009
THIRD ANGLE PROJECTION

NOTICE OF CONFIDENTIAL INFORMATION
INFORMATION CONTAINED HEREIN IS
CONFIDENTIAL AND IS THE PROPERTY OF M-D
PNEUMATICS KINNEY. THE INFORMATION
SHALL NOT BE USED OR DISCLOSED BY THE
RECIPIENT FOR ANY OTHER PURPOSE
WHATSOEVER.

APPROVALS
DRAWN JK
CHECKED GM

DATE
09/23/2021
09/24/2021

M-D Pneumatics® KINNEY®

TITLE
BOOSTER ASSEMBLY

SIZE DWG NO.
D 95020

SCALE 1:8 WEIGHT 1463.602 LB SHEET 1 OF 1

REV B