

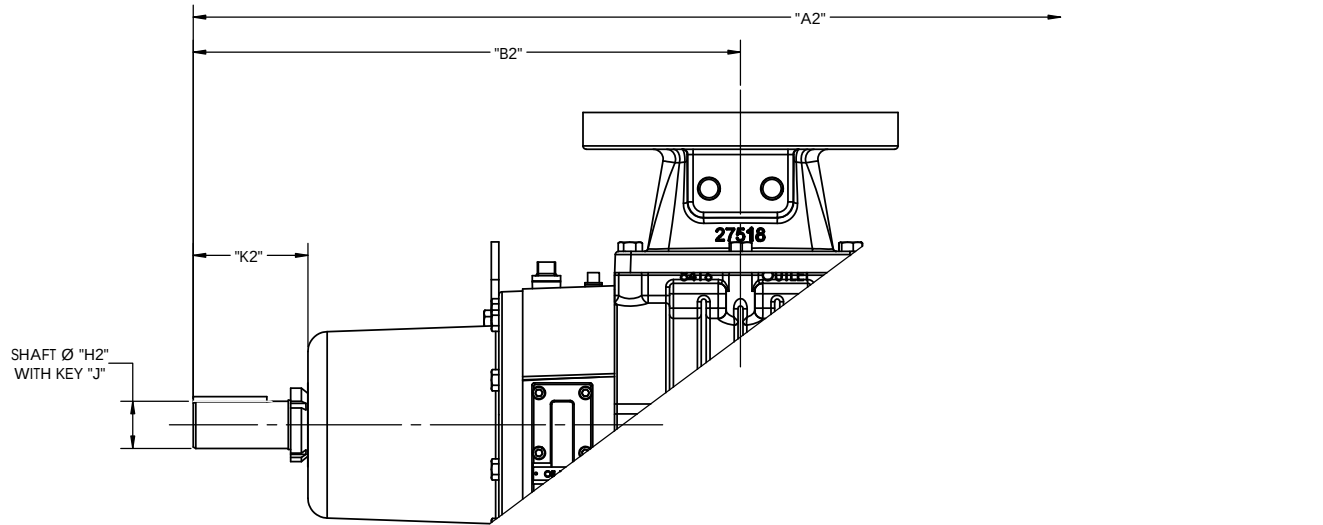


REVISIONS					
REV	ECN	DESCRIPTION	DATE	DR	CK
A		INITIAL RELEASE	09/24/2021	JK	GM

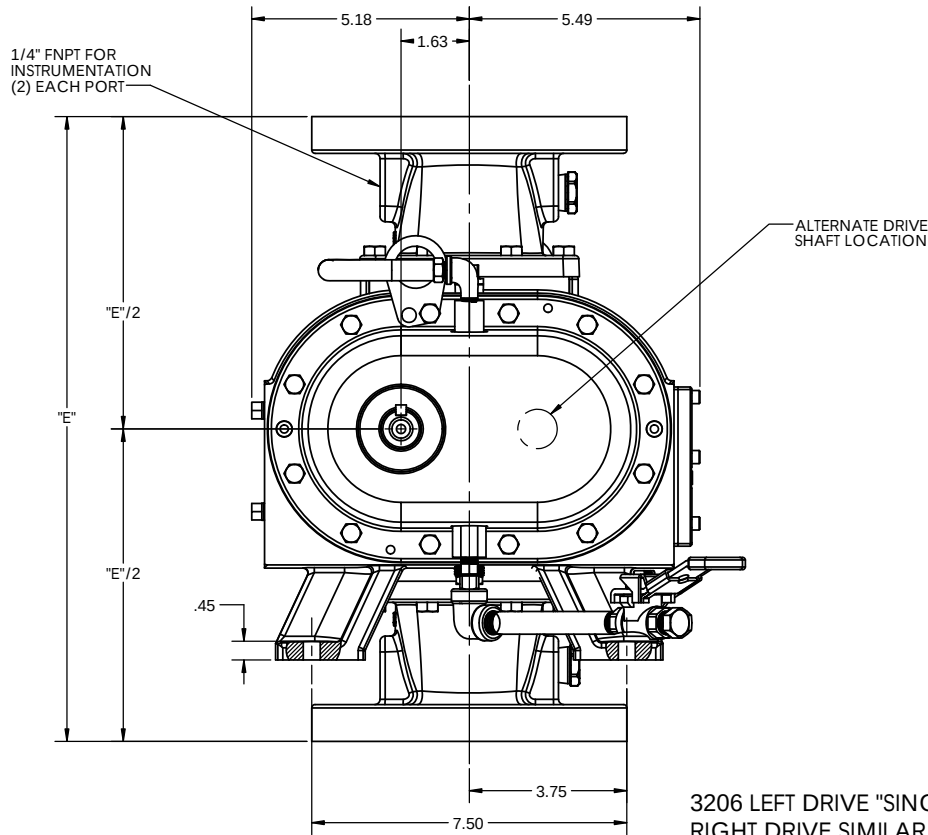


3206 LEFT/RIGHT DRIVE, "DOUBLE-ENVELOPE" MECH SEAL UNIT SHOWN
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS MATCH THE SINGLE ENV / LIP SEAL UNIT, BELOW

APPLICABLE MODEL NUMBERS: 32XX-**x2**XXXX**2xA**

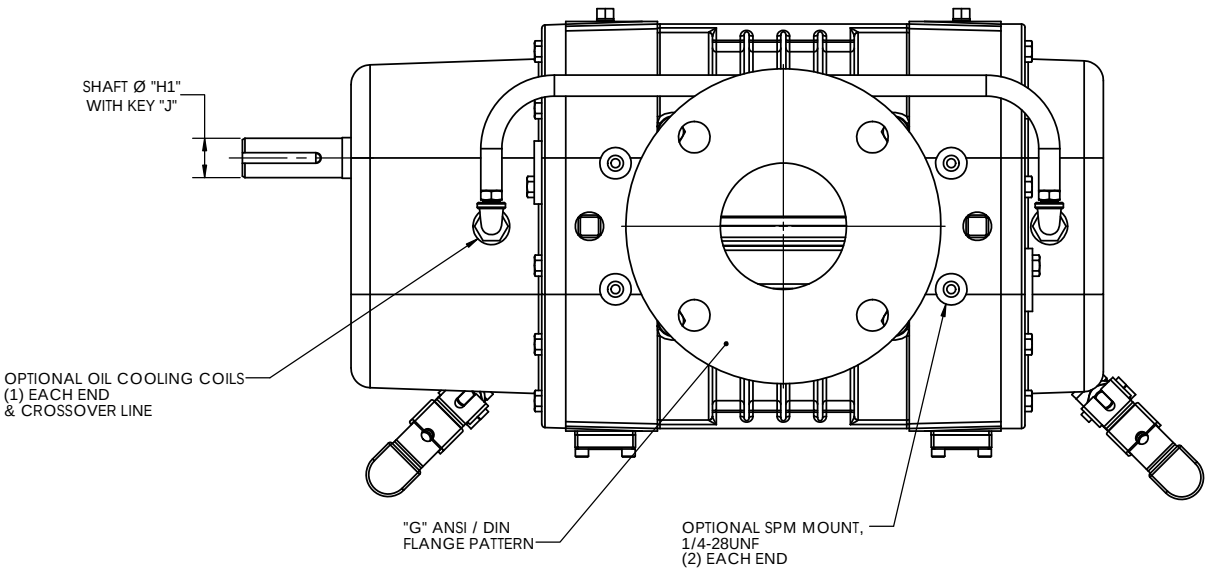

3206 LEFT DRIVE "SINGLE ENVELOPE" MECH SEAL OR LIP SEAL UNIT SHOWN.
RIGHT DRIVE SIMILAR. SEE TABLE FOR MODELS WITH DIFFERING LENGTHS

APPLICABLE MODEL NUMBERS: 32XX-**G1**XXXX**2xA**; 32XX-**A3**XXXX**2xA**

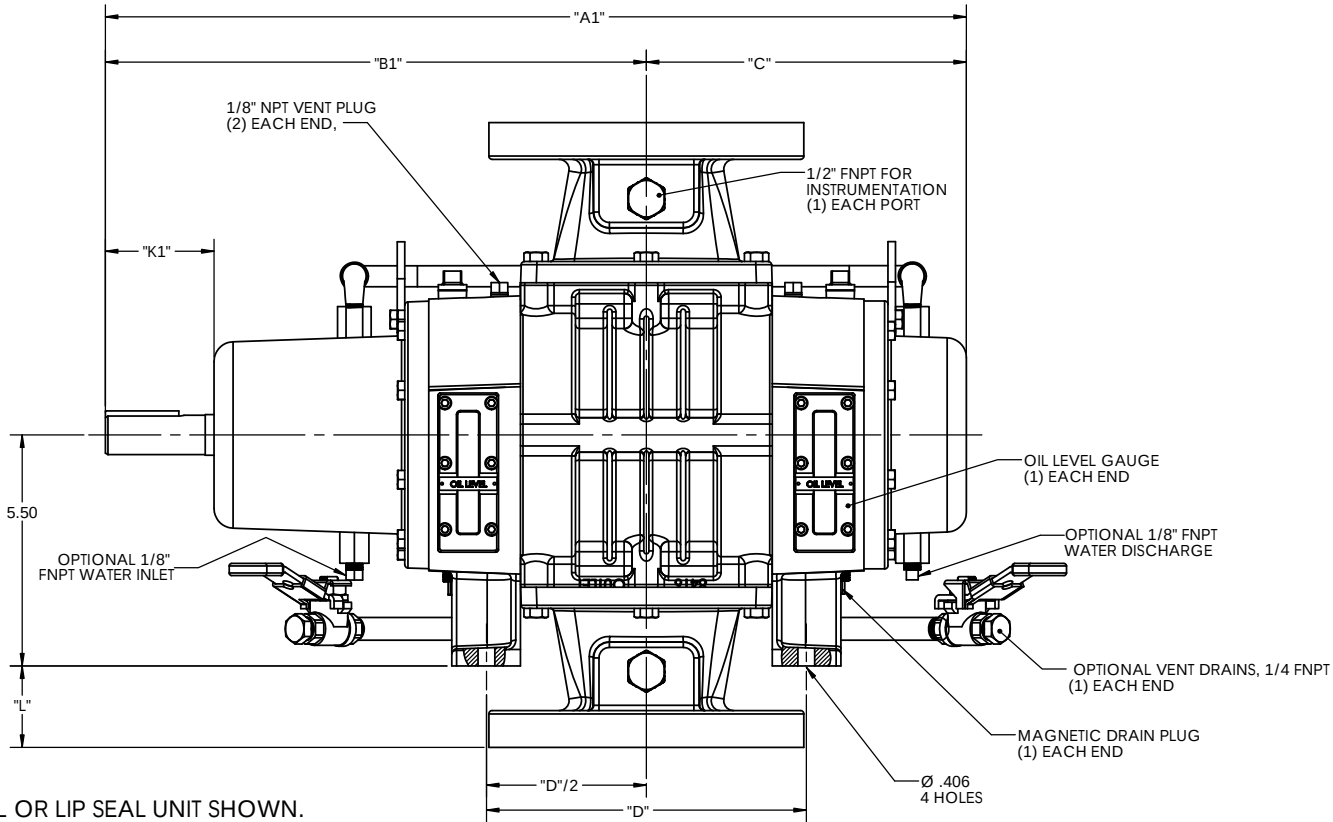

	OVERALL LENGTH		SHAFT-PORT LENGTH		PORT-REAR LENGTH	FOOTPRINT LENGTH	PORT HEIGHT	PORT STD / METRIC	SHAFT Ø STD / METRIC (mm)		KEY SIZE STD / METRIC (mm)	SHAFT LENGTH STD / METRIC (mm)		FOOT-PORT LENGTH	APOX WEIGHT (lbs)
MODEL	DIM "A1"	DIM "A2"	DIM "B1"	DIM "B2"	DIM "C"	DIM "D"	DIM "E"	DIM "G"	DIM "H1"	DIM "H2"	DIM "J"	DIM "K1"	DIM "K2"	DIM "L"	-
3204	18.5	18.65	11.88	12.03	6.62	5.62	13.26	2 / 50	.9375 / 24	1.125 / 28	.25 X 1.75 / 8 X 7 X 40	2.58 / 65	2.73 / 69	1.13	140
3206	20.5	20.65	12.88	13.03	7.62	7.62	14.87	3 / 80	.9375 / 24	1.125 / 28	.25 X 1.75 / 8 X 7 X 40	2.58 / 65	2.73 / 69	1.94	155
3210	24.5	24.65	14.88	15.03	9.62	11.62	14.87	4 / 100	.9375 / 24	1.125 / 28	.25 X 1.75 / 8 X 7 X 40	2.58 / 65	2.73 / 69	1.94	200

- NOTES:
- STAINLESS STEEL UNITS HAVE 2-1/2 / 65 FLANGE PATTERNS
 - STAINLESS STEEL UNITS HAVE 3 / 80 FLANGE PATTERNS

UNLESS OTHERWISE SPECIFIED U.S. CUSTOMARY IN.		NOTICE OF CONFIDENTIAL INFORMATION INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS THE PROPERTY OF M-D PNEUMATICS KINNEY. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSE WHATSOEVER.		M-D Pneumatics® KINNEY®	
INTERPRET PER ASME Y14.5-2009 THIRD ANGLE PROJECTION		APPROVALS		DATE	
		DRAWN JK		09/23/2021	
		CHECKED GM		09/24/2021	
TITLE		BLOWER OUTLINE, 3200 SERIES VERTICAL FLOW, FLANGED		REV A	
SIZE		DWG NO. 95024		SHEET 1 OF 1	
SCALE 1:4		WEIGHT -			